
AFTERCARE

The Easy Way to Refresh, Clean and Maintain Your Factory-Oiled Floor

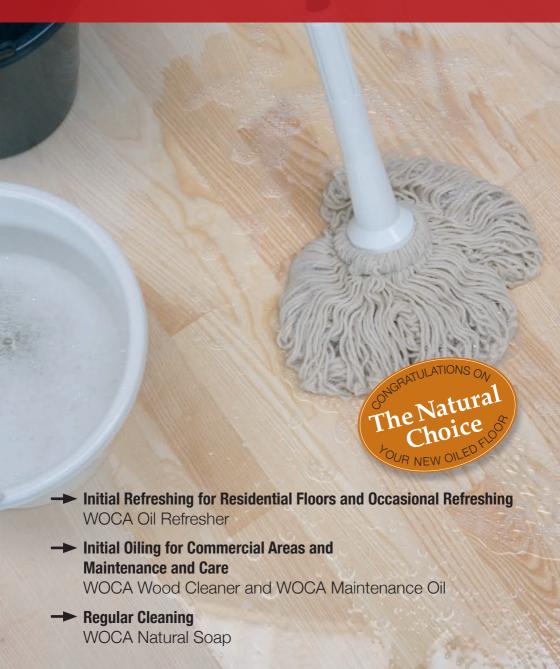

RESIDENTIAL FLOORS

Initial and occasional refreshing of ready-oiled floors industrially finished

Unlike most pre-oiled floors, ready-oiled floors do not need additional oil right after installation. Instead, it is recommended to mop the floor with WOCA Oil Refresher as initial refreshment before the floor is taken into use.

WOCA Oil Refresher, natural is typically used for natural oiled and colour-oiled floors, and WOCA Oil Refresher, white for white-oiled wood floors. WOCA Oil Refresher combines efficient cleaning with light re-oiling, as additional oil is penetrating into the wood forming a mat protective layer on the surface.

- 1 Shake the bottle well before use.
- 2 The floor must be free from dust before treatment.
- 3 Mix WOCA Oil Refresher into lukewarm water:
- For traditionally oiled floors: 1:20
 (250 ml WOCA Oil Refresher into 5 litres of water).
- For UV-oiled and oil-waxed floors: 1:40 (125 ml *WOCA Oil Refresher* into 5 litres of water).

The mixture ratio can vary depending on wear and requirement.

- 4 Use two buckets one with WOCA Oil Refresher mixed with water and one with rinse water. First, dip the floor cloth or mop into the WOCA Oil Refresher mixture and clean the floor with the light wrung cloth or mop lengthwise of the floor. Next, rinse the cloth or mop in clear water, wring hard and dip it into the WOCA Oil Refresher mixture again. This time the cloth or mop needs to be extremely hard wrung before wiping the floor again lengthwise of the floor, in order to leave as little moisture on the floor as possible. It is recommended to clean an area of approx. 10 m² at a time. By doing it this way the floor is exposed to moisture only for a short period.
- 5 Leave the floor to dry for approx. two hours before use.
- 6 If a light shine is wanted, polish the dry floor with a white pad.

COMMERCIAL AREAS

Occasional maintenance care

- re-oiling with WOCA Maintenance Oil

Depending on wear and tear, oiled floors are recommended to be maintained with WOCA Maintenance Oil. This preserves the beautiful oiled look of the floor as well as strengthens the oiled surface, while providing an ongoing durable and dirt-resistant floor which is easy to keep clean.

1. Preparation

Clean the floor with 125 ml/4 oz of WOCA Wood Cleaner mixed with 5 litres/1.25 gallons of water. Leave the floor to dry for at least 8 hours. The floor must be completely dry. In case of extreme dirt scrubb floor manually using a pad or by machine. Wipe clean with mop or cloth. Always wipe a second time so that as little water as possible remains on the surface. Repeat cleaning procedure if necessary.

Tip: Always work with two buckets – one with WOCA Wood Cleaner mixed with water and one with rinse water.

2. Application

Leave the floor to dry for at least 8 hours. The floor must be completely dry. Shake the container carefully. Apply approx. 100 ml/3 oz of oil per 4 $m^2/40$ ft² with a pad, paint roller or cotton cloth, or use a polishing machine for large surfaces.

3. Polishing

It is important that the WOCA Maintenance Oil is carefully polished into the wood. Continue polishing until the wood appears saturated and the surface looks uniform.

4. Final polishing

Wipe the floor with clean, dry cotton cloths before proceeding with the next section of floor to be finished. The floor should not appear wet and there should not be any excess oil left on the surface after polishing. Continue in sections until the floor has been finished. When polished with polishing machine, the floor will be pre-hardened after approx. 4 hours at 20°C/68°F and may cautiously be taken into use. Manually polished floors may be taken into use after 24 hours. The surface is fully hardened after 24 hours. Do not expose the floor to water during the hardening time. Continue cleaning with soap after 5 days.

WARNING

WOCA Maintenance Oil: Risk of self-ignition: Due to the risk of self-ignition it is important that sanding dust and oil soaked cloths are soaked in water and disposed of in a tightly closed container after use.














Usage guide Commercial use









For detailed instructions, please inquire on info@ttwoodcare.com

Type o	of floor			
WOCA product	Oxidative oil	Ju-dits	dirwat	lacquer all gloss
Regular cleaning "Regular nourishing cleaning"		/	/	
Master Soap	weekly	weekly	weekly	
Lacquer Soap				weekly
Oil Refresher	monthly	monthly	monthly	
Intensive cleaning "Preparing surface for maintenance"				
Wood Cleaner	twice a year	twice a year	twice a year	quarterly
Maintenance**				
Diamond Oil	twice a year			
Maintenance Paste		twice a year	twice a year	
Lacquer Care				quarterly

^{**} Before maintenance treatment, always clean with WOCA Wood Cleaner first.



Usage guide Domestic use









For detailed instructions, please inquire on info@ttwoodcare.com

Туре	of floor				
WOCA product	Oxidative	Ju-oil's	oil-mat	lacquer all	dioss
Regular cleaning "Regular nourishing cleaning"	/		<i></i>		
Natural Soap	monthly	monthly	monthly		
Lacquer Soap				monthly	
Oil Refresher	quarterly	quarterly	quarterly		
Intensive cleaning "Preparing surface for maintenance" Wood Cleaner	annually	annually	annually	quarterly	
Maintenance**					
Maintenance Oil	annually				
Maintenance Paste		annually	annually		
Lacquer Care				quarterly	

^{**} Before maintenance treatment, always clean with WOCA Wood Cleaner first.

REGULAR CLEANING

of oiled surfaces

WOCA Natural Soap, white is recommended for white-oiled floors, while WOCA Natural Soap, natural is ideal for natural-oiled floors. May be used for the cleaning and maintenance of all known oil systems. WOCA Natural Soap is a quality soap, which due to its nourishing properties quickly closes the pores of the wood and protects against dirt and penetration of liquids.

Cleaning

WOCA Natural Soap is shaken carefully before use. The soap is mixed with 5 litres of lukewarm water. It is recommended always to work with two buckets: one with soap water and one with rinse water. Clean the floor with minimum quantity of water – leave soap water on floor briefly in order to dissolve dirt. Remove dirty soap water with hard wrung out mop or cloth and rinse out in bucket with rinse water.

Always wipe floor with soap water with hard wrung mop or cloth in order to re-establish the protective Natural Soap film.

Tip: Very dirty floors may be cleaned with WOCA Wood Cleaner and subsequently with WOCA Natural Soap. Areas with heavy wear may be maintained with WOCA Maintenance Oil after cleaning with WOCA Wood Cleaner. Particularly difficult stains may be removed with WOCA Spot Remover. Black water marks may be removed with WOCA Tannin Spot Neutralizer.

TIPS AND TRICKS

In order to enjoy your wooden floor for a long time, we advise you to give the correct care and notice following points:

- Keeping a healthy indoor climate is important both for residents and for the preservation of a floor
- A room temperature between 18 and 21°C (64-69°F) and a relative air moisture between 50 and 60 percent are ideal
- Affix felt protectors to the feet of furniture and chairs
- If possible, avoid spiky footwear such as stiletto heels
- Make sure you have special dirt-trapping floorings in entrance areas
- If furniture with rollers are used, these should comply with the EN 12529, if necessary suitable felt protectors are required
- Follow the manufacturer's care instructions.





Rags, pads, or waste soaked with oil may self ignite if improperly discarded. Immediately after use, place all rags and waste in a sealed, water filled bucket for proper disposal.

For detailed instructions, please visit

www.wocadenmark.com or www.wocausa.com

Recommended by

Cost Less Carpet 1928 Fowler Richland, WA 99352 Costlesscarpet.com